



### Submittal Data

#### PFV88U True Union Ball Valve with HDPE Fusion Connections



Project Name:		Representative:
Contractor:		Engineer:
Ref/P.O.#:		Date:
Submitted by:		Date:
Qty:	Part #:	Description

### Technical Data


Application: Union ball valve for geothermal systems with 2" HDPE pipe  
 Material:\* PVC valve body, shaft, union nut, and ball; PP handle; HDPE ball seats and connection to piping system; EPDM shaft and body O-rings, dampener seal, and end connector O-ring  
 Flow Coefficient: Cv = 210 [Kv = 3000]  
 Connections: 2" IPS HDPE DR11 pipe x union

Max. Fluid Temperature: 140°F [60°C]\*\*  
 Min. Fluid Temperature: 20°F [-7°C]\*\*  
 Max. Operating Press.: 100 psi [6.9 bar] @ 100°F [38°C]\*\*  
 Approved Antifreeze: Ethanol, Methanol, Propylene Glycol

\*PVC is polyvinyl chloride; PP is polypropylene; HDPE is high density polyethylene; EPDM is ethylene propylene diene monomer (M-class) synthetic rubber.

\*\*The assembly consists of PVC and HDPE material. Above parameters are the lower of the two values for HDPE and PVC.

### Dimensional Data

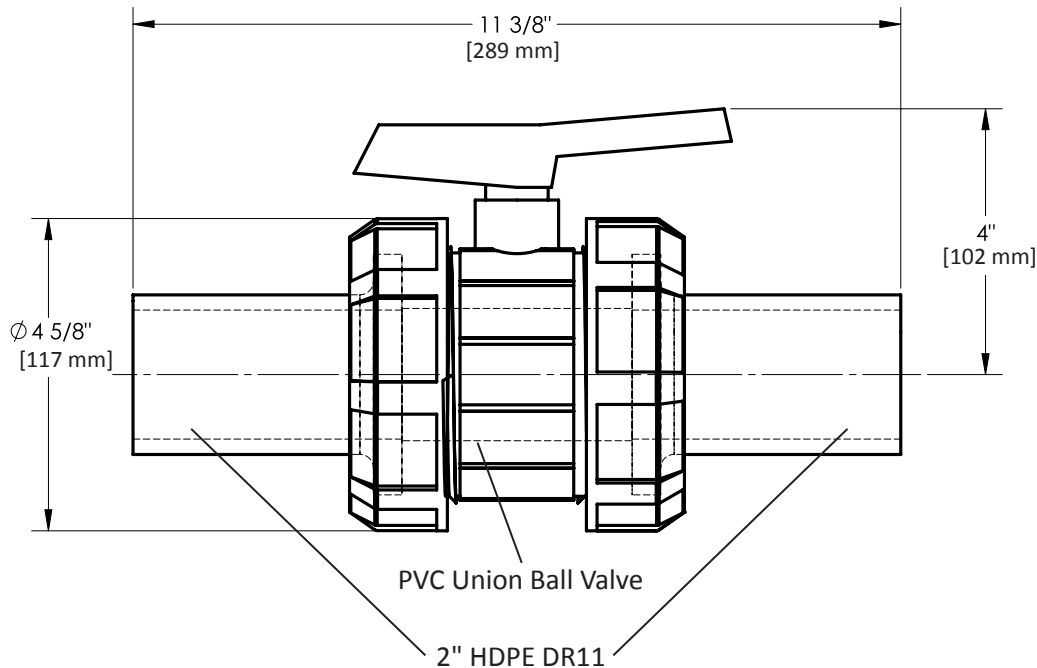

#### NOTES:

1. Dimensional data provided for informational purposes, and is rounded to nearest 1/16".
2. Metric data is a simple conversion of imperial data, and should not be considered more accurate.



GEO-FLO PRODUCTS CORPORATION  
 905 Williams Park Drive  
 Bedford, Indiana 47421 U.S.A.  
 Phone: 812-275-8513 Fax: 812-275-8523  
 www.geo-flo.com